


TOOLBOX TALKS

The Upside of Safety



Warning Lines

Warning lines may be used as a form of fall protection when performing roof work on a low slope roof.

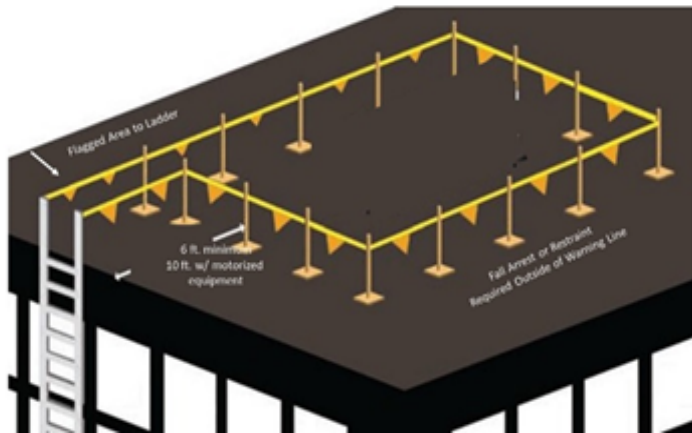

Low Slope Roof

A low slope roof is defined as a roof that has a slope less than or equal to 4/12

If the slope of the roof you are working on has a sloper greater than 4/12, a different fall protection system must be utilized.

The Basics

- Warning lines/flags must be highly visible
- Warning lines must be set up around all sides of the roof
- Warning lines must be set up at least 6 feet away from edge of the roof.
- If using mechanical equipment the warning lines must be set up at least 10 ft away from the roofing edge.
- When working outside of the warning lines one of the following additional fall protection systems must be utilized:
 - Fall Restraint
 - Personal Fall Arrest
 - Guardrail
 - Safety Monitor



Store material inside of the warning lines to prevent workers from having to go outside of the lines.



Remember: there must be a path from the ladder to the interior of the flagged area (no matter the distance). The path must have a rope or similar across the opening when not in use.

